




Ring clips are used for upright mounting of can-type (cylindrical) components. The clip surfaces are specially treated and corrosion-protected.

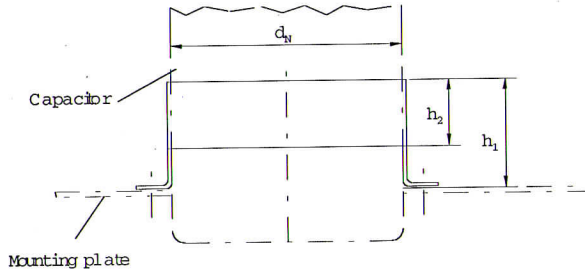

Ring clips are supplied with AM 4 x 25 DIN 84 clamping screws and DIN 934 nuts included. Additional insulation can be achieved by inserting a 30 mm-wide insulating strip between the capacitor and the ring clip. In such cases, attention must be paid to any relevant regulations (e.g. VDE, BSA or UL regulations).

| d_N | h_1 mm | h_2 | Ring clip version | Ordering code |
|-------|-------------|-------|-------------------|-------------------|
| 35 | 19 | 14,2 | | B44031-A0350-A000 |
| 50 | 30,3 | 19 | | B44031-A0500-A000 |



B44031 Accessories

| d_N | h_1 mm | h_2 | Ring clip version | Ordering code |
|-------|-------------|-------|-------------------|-------------------|
| 65 | 30,3 | 19 | | B44031-A0650-A000 |
| 75 | 30,3 | 19 | | B44031-A0750-A000 |